


VIEW A-A (2 : 3)

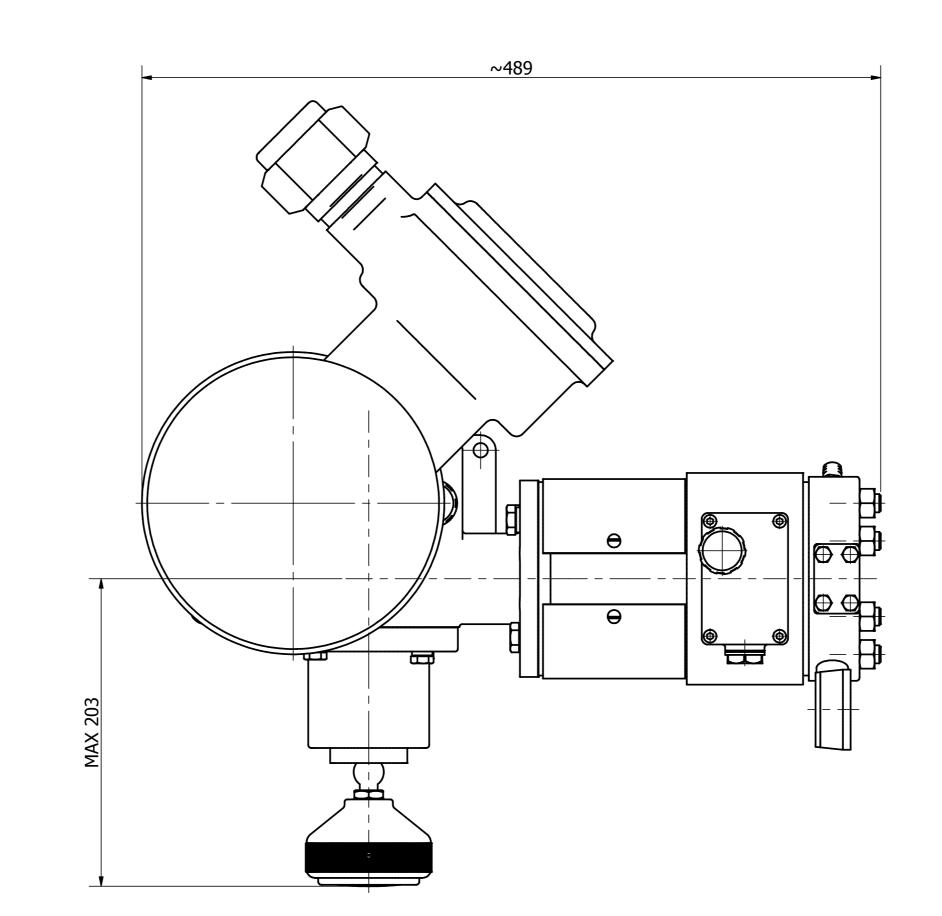

		DRY WEIG	GHT [KG]	OIL [LITER]		
	MOTOR	80	D			
		SAFE	EXD			
		-	~34			
DLIN	MP, Ø16 mm		-38	PUMP HEAD	0.25	
PON			~J0	GEAR	0.25	
MAG	CHINE	-	~72			

- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. DIMENSIONS ENCLOSED WITHIN PARANTHESES INDICATE REFERENCE.
- 3. REFER YOUR INSTALLATION MANUAL FOR RECOMMENDED OIL QUALITY.

NOTE:			1			DISCL AIMER:		
CASTING NUINVENTOR NO DESIGNED					n ISO 128 - 30 n ISO 128 - 30	SPXFLOW RESERVES THE RIGH MINOR DEVIATIONS FROM DIME BASED ON MOTOR SELECTION.		
>Bra	n+Lue	ppe.	TITLE 1 TITLE 2	METERING PUMP				
DRAWN	PSR	10/05/17	MATERIAL	_	IDENTN	0	REV. 0	
CHECKED	PSR	10/05/17	FORMAT	CCALE	CHEET	DDAY WAS NO	V	
APPROVED	T.RIEL	15/05/17	FORMAT	SCALE	SHEET	DRAWING-NO.	CNDT	
RELEASED	T.RIEL	15/05/17	A1	1 : 2.5	1/1	GA-K-16-M	-U-NPI	